


Sync Safety system

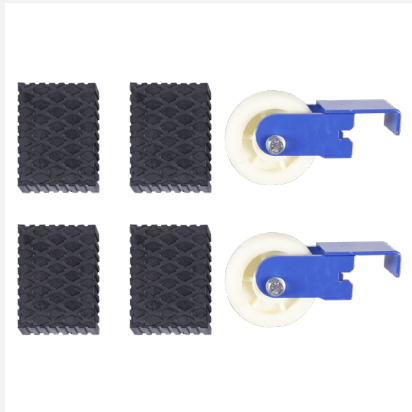

Incl. castors and recording blocks (40 mm thick)

#### Technical specifications

capacity	3000 kg
voltage	230V
engine power	1,5 kw
min. lifting height	115mm
max. lifting height	985 / 1025mm
lock	automatic
length platform	1984mm
width platform	520mm
width between platforms	821mm
lifting time	35 seconden
lower time	25 seconden
weight	680 kg
oil capacity	8L CH32 / CH46 (Not included)

All Falco's car bridges comply with the NEN-EN1493 safety standard and are supplied with a Dutch manual including maintenance protocol and CE certificate 2006/42/EC.

## 3000kg 230V Tyre bridge VL75F230B



- Sync safety system
- Weighted version 680kg
- Incl wheel set and mounting blocks
- Suitable for fixed installation and mobile use
- Emergency device to lower the bridge in case of failure / power outage



This Falco tyre bridge has efficiency and ease of use at its heart. Thanks to the Sync safety system, it always lowers synchronously. The bridge is equipped with foot safety in the form of an acoustic signal and rail. The full-length lanes are made of wear-resistant checker plate.

The stable solid design is easy to use anywhere on a straight surface and also features mounting holes for fixed installation. It can be used both mobile and fixed. Bridge comes with wheel set as standard, making it easy to move the bridge around and maximize the use of your workshop.

#### Features

- Extra low 110 mm ramp height
- Mobile tyre ramp
- Powerful hydraulic cylinders
- Fully automated electric safety lock
- Foot protection incl. acoustic safety signal
- Start lift
- Adjustable ramp / extension piece
- Foot protection switch
- Manual emergency valve, lowering also possible in case of power failure
- Incl. wheel set, plug and rubber pads (40 mm thick)

